

WIDE ANGLE PUMP LEVEL CONTROL

Series: BP-PMPD
0.75 HP @ 120 VAC
2 HP @ 230 VAC
Max. pump running: 15 amps



This pump switch is designed to directly control pumps up to 0.75 HP at 120 VAC and 2 HP at 230 VAC in non-potable water and sewage applications. The switch is not sensitive to turbulence, allowing it to be used in both calm and turbulent applications.

FEATURES


- ▶ Heavy-duty contacts.
- ▶ Controls pumps up to 0.75 HP at 120 VAC and 2 HP at 230 VAC.
- ▶ Adjustable pumping range of 7" - 36" (18-91 cm).
- ▶ Includes standard mounting clamp and boxed packaging.
- ▶ UL & CSA Certified.

OPTIONS

- ▶ For pump down or pump up applications as specified by part number.
- ▶ With a 120 VAC or 230 VAC piggy-back plug.
- ▶ Without a plug for direct wiring in 120 VAC or 230 VAC applications.
- ▶ In standard cable lengths of 15, 20, 30 or 50 feet (5, 6, 9 or 15 meters).

SPECIFICATIONS

- ▶ **Cable:** flexible 14 gauge, 2 conductor, SJOW or SJTOW, water-resistant CPE.
- ▶ **Float:** 3.05" diameter x 3.56" long (7.75 x 9.04 cm), high impact, corrosion resistance, PVC housing for use in sewage and water up to 140 °F (60 °C).

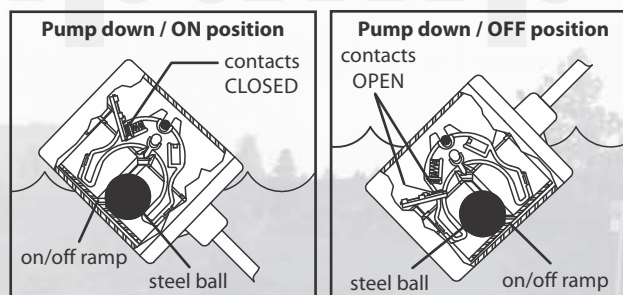

MODEL	PART No.	DESCRIPTION	WEIGHT
BP15PMPD1WP	32010251A	15 ft, w/ 120 V, piggy-back plug	2.23 lb
BP15PMPD2WP	32010251B	15 ft, w/ 230 V, piggy-back plug	2.23 lb
BP20PMPD1WP	32010252A	20 ft, w/ 120 V, piggy-back plug	2.57 lb
BP20PMPD2WP	32010251C	20 ft, w/ 230 V, piggy-back plug	2.57 lb
BP30PMPD1WP	32010251Z	30 ft, w/ 120 V, piggy-back plug	3.38 lb
BP30PMPD2WP	32010251D	30 ft, w/ 230 V, piggy-back plug	3.38 lb
BP50PMPD2WP	32010251E	50 ft, w/ 230 V, piggy-back plug	3.63 lb
BP15PMPDWOP	32010251F	15 ft, without plug	2.13 lb
BP20PMPDWOP	32010251G	20 ft, without plug	2.49 lb
BP30PMPDWOP	32010251H	30 ft, without plug	3.30 lb

Note: this switch must be used with pumps that provide integral thermal overload protection.